
V10 GATEFOLD

gatefold type cardboard outersleeve for 1 or 2 x10" vinyl

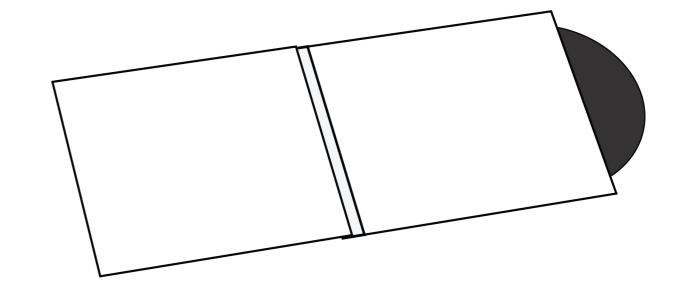

PRINT REQUIREMENTS

Print file in PDF.

Use CMYK colour mode.

Resolution: 300 dpi, scale 1:1.


Delete all template lines from the print file; leave crop marks only.

Ensure that 3mm bleeds are added around the artwork.

(320%) Maximum ink levels: 320%.

For reverse board/uncoated paper, maximum ink levels: 260%.

For hot stamping, embossing, and spot UV, use spot color 100% in vector format only.

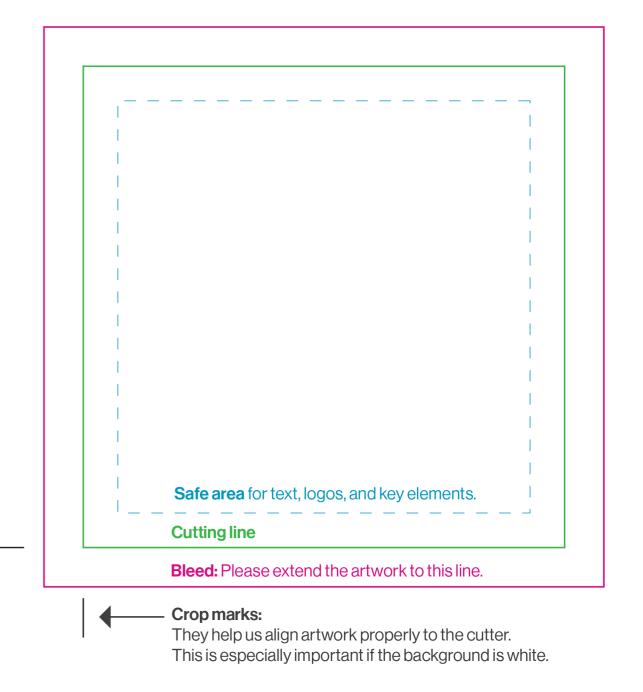

TIPS FROM OUR PRINTHOUSE

- Check the panel orientation! Front, Back, Inside we are folding covers, so some pages may be upside down on our template.
- Gray separations: If you want black and white artwork, create grayscale using only the black channel (K).
- For grayscale enriched with CMYK, remember the proportions of 2x K compared to other inks, for example, C20M20Y20K. This provides better control over colour hue.
- The minimum ink amount is 6% values below this threshold won't be visible in print.
- Remember the contrast in ink between dark elements; what you see on the screen may not be as visible in print.
- ✓ Images on the screen appear brighter than in print (the screen shines, paper doesn't).
- Be cautious with borders around the edge; the knife may cause uneven frames.
- Letters should be larger than 6p; below that size, we can't guarantee sharp printed letters, especially for thin or light fonts.
- Letters look better in vector format rather than bitmap.
- Black letters will be sharper when made solely of 100%K and set to overprint.
- ✓ Barcodes work best when made solely of 100%K.
- Keep in mind that finishing processes may slightly alter colours: matte foil reduces contrast, while glossy foil intensifies the depth of dark colours.

